
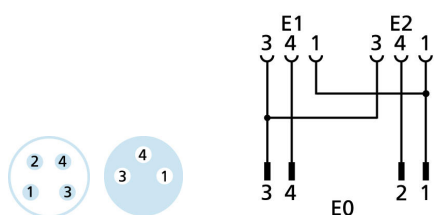


# Y-splitter, M8, male, straight, 4 poles, M8, female, straight, 3 poles, M8, female, straight, 3 poles

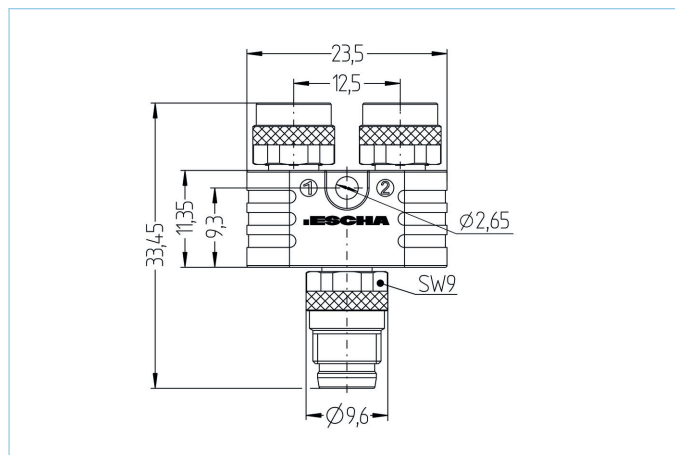

## Product data

|                    |                           |
|--------------------|---------------------------|
| Item description   | MB-SSP4-2SKP3             |
| Item-No.           | 8025693                   |
| Customs tariff-No. | 85366990                  |
| Step-File          | MB-SSP4-2SKP3_S56_S60.stp |
| EAN                | 4047106027339             |

| Technical data           | Exit 0                     | Exit 1                     | Exit 2                     |
|--------------------------|----------------------------|----------------------------|----------------------------|
| Connector                | male, M8, straight         | female, M8, straight       | female, M8, straight       |
| Contact material         | Metal, CuZn, gold-plated   | Metal, CuZn, gold-plated   | Metal, CuZn, gold-plated   |
| Contact-carrier material | Plastic, TPU, BK           | Plastic, TPU, GY           | Plastic, TPU, BK           |
| Coupling nut material    | Metal, CuZn, nickel-plated | Metal, CuZn, nickel-plated | Metal, CuZn, nickel-plated |
| Rated voltage            | 60V                        | 60V                        | 60V                        |
| Number of pins           | 4                          | 3                          | 3                          |
| Current load (at 40°C)   | 4A                         | 4A                         | 4A                         |

|                                |                    |
|--------------------------------|--------------------|
| Insulation resistance          | $\geq 10^9 \Omega$ |
| Ambient temperature product    | -30°C...+90°C      |
| Grip body material             | Plastic, TPU, BK   |
| Sealing (female) material      | FPM/FKM            |
| Mechanical life-cycle          | >100 mating cycles |
| Standards                      | IEC 61076-2-104    |
| Degree of protection (mounted) | IP65, IP67, IP68   |
| Degree of pollution            | 3                  |

**Classification**

|            |          |
|------------|----------|
| eCl@ss 6.0 | 27279201 |
| eCl@ss 7.0 | 27279201 |
| eCl@ss 8.0 | 27279201 |
| eCl@ss 9.0 | 27440106 |
| ETIM 5.0   | EC002062 |
| ETIM 6.0   | EC002925 |

**Link to product**

<https://www.escha.net/en/products/standard/t-splitters-y-splitters/8025693/y-verteiler-m8-stecker-4-polig-m8-buchse-3-polig-m8-buchse-3-polig>