


K50BCLS1XRX PQ

LED Indicator – Beacon




Technical data

Type	K50BCLS1XRX PQ
ID	3019788
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Red, flashing
LED service life (L70)	50000 h
Dimmable	No
Features of color 1	Red, Miscellaneous
Special features	Wash down
Electrical data	
Operating voltage	12...30 VDC
DC rated operational current	≤ 160 mA
Max. current consumption per color	160 mA
Input type	PNP
Response time typical	< 0.25 ms
Mechanical data	
Cascadable	No
Design	Puck, K50BL
Dimensions	Ø 50 x 60 mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, clear
Electrical connection	Connector, M12 × 1, PVC
Number of cores	5
Ambient temperature	-40...+50 °C
Relative humidity	0...90 %
Protection class	IP67

Features

- Flashing LED
- Top and side view
- Two flashing speeds
- Screw-in thread M30x1.5
- Protection class IP67
- Colors: Red flashing (COL 2)
- Operating voltage 12...30 VDC

Wiring diagram

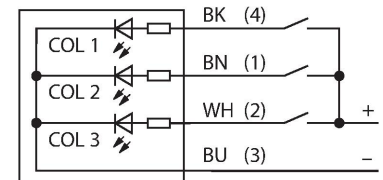

Functional principle

The LED is IP67/ IP69k rated and suited for indoor and outdoor applications. The rotating and blinking K50 Beacon produces a very bright and all-round visible signal

