


# Glass Fiber Bifurcated Fiber BT23PM6

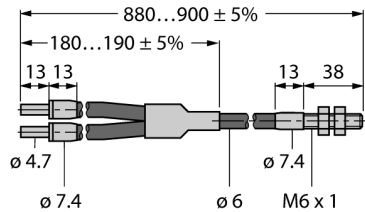

- Operating mode: Diffuse/Retroreflective
- PVC with galvanized spiral jacket
- Operating temperature of fiber-optic jacket: -40 °C ... +105 °C
- End sleeve for probe, M6 thread
- Optical fiber, bundle diameter: 3.2 mm
- Optical fiber, total length: ± 914 mm

### Functional principle

Glass or plastic fibers are the optimum choice for high-temperature applications and limited spaces. They transfer the light from the sensor to a remote object. Individual fibers are used for opposed mode sensing, whereas bifurcated fibers are suited for retroreflective or diffuse mode operation.

Type	BT23PM6
ID	3024735

Optical data	
Function	Diffuse mode sensor
Fiber-optic type	Glass

Mechanical data	
Housing material	Plastic, PVC, Black
Jacket material	PVC over Stainless Steel Monocoil
Jacket material	plastic, PVC
Bundle diameter	3.2 mm
Material of the fiber-optic tip	Stainless Steel
Bending radius	Ø 25 mm
Ambient temperature	-40...+105 °C
Max. temperature tip	249 °C