


# CL50ZR


## LED Indicator – Tower Light



### Features

- LED tower light
- Individually controllable
- Mechanical screw-in thread M30x1.5
- Protection class IP67
- Monochrome: Red (COL 1)
- Cable, 2m
- Operating voltage 18...264 VAC

### Wiring diagram

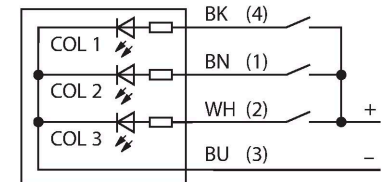

### Functional principle

Multicolor/multifunction display  
 Rugged and well-priced LED tower, easy to install  
 Illuminated segments for clear operator guidance and display of system status.  
 Display of up to 3 colors.  
 Compact devices, no controller required  
 No mounting

### Technical data

Type	CL50ZR
ID	3059784
<b>Signal and display data</b>	
Purpose	LED indicator light
Function	Tower light
Light type	Red
LED service life (L70)	50000 h
Dimmable	No
Features of color 1	Red, Permanently on, 38 lm
<b>Electrical data</b>	
Operating voltage	85...264 VAC
AC rated operational current	≤ 80 mA
Max. current consumption per color	60 mA
Input type	AC
Response time typical	< 500 ms
<b>Mechanical data</b>	
Cascadable	No
Design	Smooth barrel, CL50Z
Dimensions	Ø 50 x 183.2 mm
Housing material	Plastic, ABS/Polycarbonate, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-40...+50 °C
Relative humidity	0...95 %
Protection class	IP67

## Technical data

### Tests/approvals

Approvals

CE, UL listed

---