

# TL50BLZR2

## LED Indicator – Tower Light

### Technical data


Type	TL50BLZR2
ID	3085441
<b>Signal and display data</b>	
Purpose	LED indicator light
Function	Tower light
Light type	Red, flashing
LED service life (L70)	50000 h
Dimmable	No
Features of color 1	Red, Flashing, 24 lm
<b>Electrical data</b>	
Operating voltage	85...264 VAC
AC rated operational current	≤ 70 mA
Max. current consumption per color	55 mA
Input type	AC
Response time typical	< 500 ms
<b>Mechanical data</b>	
Cascadable	No
Design	Smooth barrel, TL50BLZ
Dimensions	Ø 50 x 133.8 mm
Housing material	Plastic, ABS, Black
Window material	Polycarbonate, clear
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-40...+50 °C
Relative humidity	0...95 %
Protection class	IP67
<b>Tests/approvals</b>	
Approvals	CE, UL listed



### Features

- Plastic housing, black
- Protection class IP67
- EMI and RFI immune
- Monochrome: Red flashing (COL 1)
- Operating voltage: 85...264 VAC

### Wiring diagram

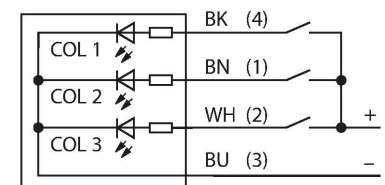

### Functional principle

The rugged multifunction TL50 beacons are available in many variations and are easily mounted. They can be assembled from maximally four varicolored LEDs, with or without beeper. You can choose from three different lighting functions (steady, rotating, flashing). In the type code the lighting function is indicated after the color (without number: steady; 1: rotating; 2: flashing). Good visible display of status for indoor and outdoor applications.

The wiring diagram shows a PNP pin assignment

The type code indicates the 5 colors blue (B), green (G), red (R), yellow (Y) and white (W) in the same order in which they are arranged in the beacon, from bottom to top. Example: TL50GYRQ.