


K50BCLS1XBXPQP

LED Indicator – Beacon

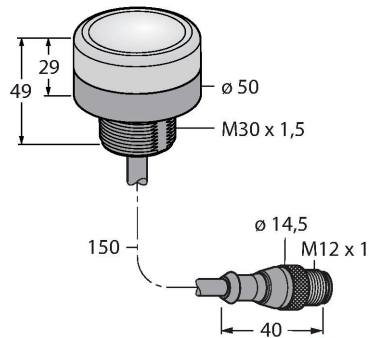


Technical data

Type	K50BCLS1XBXPQP
ID	3086510
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Blue, flashing
LED service life (L70)	50000 h
Dimmable	No
Features of color 1	Blue, Miscellaneous
Special features	Wash down
Electrical data	
Operating voltage	12...30 VDC
DC rated operational current	≤ 160 mA
Max. current consumption per color	160 mA
Input type	PNP
Response time typical	< 0.25 ms
Mechanical data	
Cascadable	No
Design	Puck, K50BL
Dimensions	Ø 50 x 49 mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, clear
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC
Number of cores	5
Ambient temperature	-40...+50 °C
Relative humidity	0...90 %

Features

- Flashing LED
- Top and side view
- Two flashing speeds
- Screw-in thread M30x1.5
- Protection class IP67
- Colors: Blue flashing (COL 2)
- Cable with male end M12 x 1
- Operating voltage 12...30 VDC

Wiring diagram

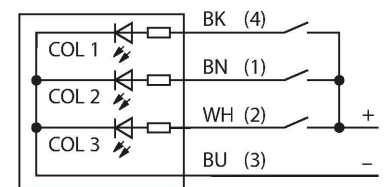



Functional principle

The LED is IP67/ IP69k rated and suited for indoor and outdoor applications. The rotating and blinking K50 Beacon produces a very bright and all-round visible signal


Technical data

Protection class	IP67 IP69
Tests/approvals	
Approvals	CE, cULus listed

Accessories

SMB30A	3032723	SMB30SC	3052521
Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread		Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable	
			

Accessories

Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval
	WKC4.4T-2/TEL	6625025	Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval