


K50LRXALSXP


LED Indicator – Beacon with Audible Signal



Features

- LED all-round visible
- Continuous signal: 65dB
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Protection class IP69K
- Monochrome: Red (COL 1)
- Cable, 2 m
- Operating voltage 12...30 VDC

Wiring diagram

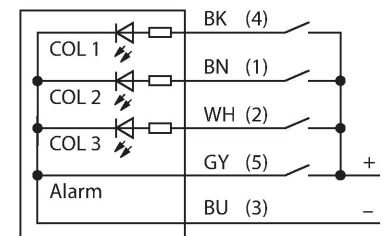

Functional principle

The LED is IP67 / IP69k rated and qualified for indoor and outdoor applications. Depending on the connection, one of the two colours lights steady for the duration of a PNP input signal.

Technical data

Type	K50LRXALSXP
ID	3091254
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Red
Dimmable	No
Features of color 1	Red, Permanently on
Acoustic signal	Continuous tone, 94 dB
Special features	Wash down
Electrical data	
Operating voltage	12...30 VDC
DC rated operational current	≤ 65 mA
Max. current consumption per color	35 mA
Max. current consumption of beeper	35 mA
Input type	PNP
Response time typical	< 1 ms
Mechanical data	
Cascadable	No
Design	Dome, K50L
Dimensions	Ø 50 x 62 mm
Housing material	Plastic, PC Thermoplastic material, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	5
Ambient temperature	-20...+50 °C


Technical data

Relative humidity	0...95 %
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed

Accessories

SMB30A	3032723
--------	---------

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



SMB30SC	3052521
---------	---------

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

