


Switching Power Supply Module IM82-24-2.5

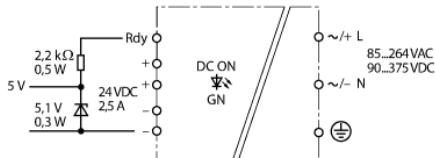


The IM82-24-2.5 power supply unit is designed for DC consumers, in particular for the supply of switching and monitoring devices of the TURCK IM, IME, IMS and IMC series.


The power supply provides 24 VDC output voltage and 2.5 A output current. With the potentiometer V_{out} the output voltage can be adjusted in a range between 24...28 VDC. The device provides safety extra-low voltage (SELV) according to EN 60950.

The power supply can be set to single or parallel operating mode (with decoupling diode).


- Output voltage adjustable 24...28 VDC
- Nominal current 2.5 A
- Single/parallel operating mode
- Surge protection
- Universal operating voltage
- Mains failure bridging up to 30 ms
- High efficiency
- Natural air cooling
- Safety extra-low voltage SELV IEC/EN 60950

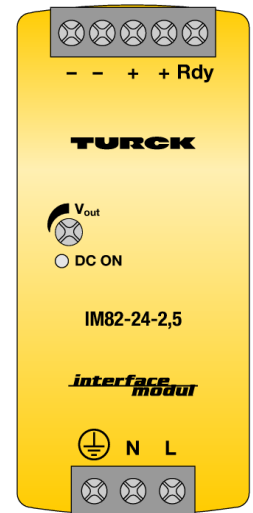


Dimensions




Derating



Short-circuit behaviour



Parallel operation

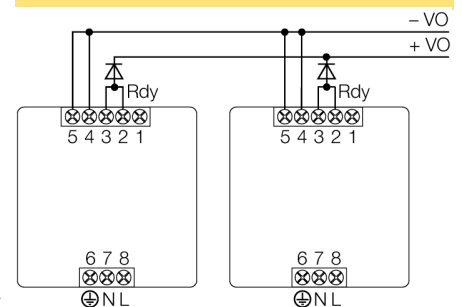

Type	IM82-24-2.5
ID	7545041
Nominal voltage	Universal voltage supply unit
Operating voltage	85...264 VAC
Frequency	47...63 Hz
Operating voltage	90...375 VDC
Power consumption	≤ 83 VA
Power dissipation, typical	≤ 8.8 W
Efficiency	89 %
External fuse	B5A
Internal fuse	T 2 A / 250 VAC
Inrush current	U _i = 115 VAC, 20 A; U _i = 230 VAC, 40 A
Mains buffering	U _i = 115 VAC, 20 ms; U _i = 230 VAC, 30 ms
Output circuits	
Nominal output voltage	24 V
Adjustment range	24...28 V
Nominal current	2.5 A
Semiconductor output circuits	
Output circuits (digital)	1 x transistor level 24 VDC
Switching voltage	≤ 24 VDC
Switching current per output	≤ 0.035 A
Overload protection	110...150 %
Surge limiting	125...138 %
Parallel mode	yes, via diodes
Ripple	50 mV
Pollution degree	2
Surge category	II
Short-circuit behaviour	Current limiting
Response characteristic	
Limit frequency	≤ 80000 Hz
Galvanic isolation	
Test voltage	3.0 kV
Displays/Operating elements	
Operational readiness	Green
Mechanical data	
Protection class	IP20
Flammability class acc. to UL 94	V-0
Ambient temperature	-25...+70 °C
Storage temperature	-25...+85 °C
Derating	-2.5 %/°C from 60 °C
Dimensions	90 x 40.5 x 114 mm
Weight	401 g
Mounting instructions	DIN rail (NS35)
Housing material	Plastic
Electrical connection	Screw terminals
Terminal cross-section	0.2...2.0 mm ²
Tightening torque	0.5 Nm