



Gateway for BL67 I/O system

Interface for DeviceNet™

BL67-GW-DN

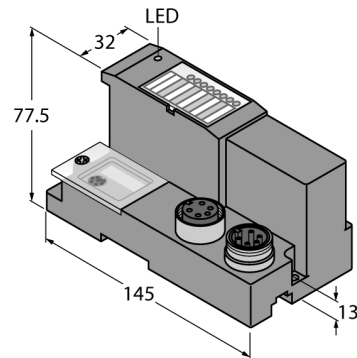

- 3 decimal rotary coding switches
- Protection class IP67
- LEDs for display of supply voltage, group and bus errors
- Interface between the BL67 system and DeviceNet
- 120/250/500 kbps
- Two males 7/8", 5-pin, fieldbus connection



Type	BL67-GW-DN
ID	6827183
Supply voltage	24 VDC
Admissible range	11...26 VDC
Nominal current from module bus	≤ 600 mA
max. system supply current $I_{mb (GV)}$	1.5 A
Max. sensor supply I_{sens}	4 A electronically limited current supply
max. load current I_o	8 A
Voltage supply connection	From DeviceNet cable
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus address range	0...63
Fieldbus connection technology	2 × 7/8", 5-pin
Fieldbus termination	external
Service interface	RS232 interface (PS/2 socket)
Dimensions (W x L x H)	74 x 145 x 77.5 mm
Approvals	CE, cULus
Ambient temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	5...95 % (internal), level RH-2, no condensation (when stored at 45 °C)
Vibration test	Acc. to EN 61131
Extended vibration resistance	VN 02-00 and higher
- up to 5 g (at 10 to 150 Hz)	for mounting on DIN rail no drilling according to EN 60715, with end bracket
- up to 20 g (at 10 up to 150 Hz)	for mounting on base plate or machinery Therefore every second module has to be mounted with two screws each.
Shock test	Acc. to IEC 60068-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electromagnetic compatibility	Acc. to EN 61131-2
Protection class	IP67
DIN rail mounting	yes, Attention: Offset
Direct mounting	Two mounting holes, Ø 6 mm

DeviceNet™ IN



Functional principle

BL67 gateways are the head component of a BL67 station. They are designed to connect the modular fieldbus nodes to the higher-level fieldbus (PROFIBUS-DP, DeviceNet, CANopen, Ethernet Modbus TCP, PROFINET, EtherCAT or EtherNet/IP).

All BL67 electronic modules communicate via the internal module bus, the data of which is transferred to the fieldbus via the gateway. All I/O modules can thus be configured independently of the bus system.

Included in delivery

1 x end plate BL67