

X-PLUS ET S4 Series Drives

EtherCAT®

3rd
FIRMWARE
GENERATION

SIL3
SAFE TORQUE
OFF (STO)


STO
X-PLUS
EtherCAT®

INTRODUCTION

- New series of stepping motor drives with EtherCAT interface, direct input from the main AC power supply (from 110 VAC to 230 VAC) and STO function.
- Drives optimized for coupling with SANYO DENKI stepping motors, fitted with encoder, but also able to manage third party motors.
- High performance in terms of power and able to further increase the application potential.
- Compact system, developed to offer a wide variety of integrated functions and optimized for the most demanding motion control applications.

MAIN EtherCAT® FEATURES

- Modes of operation: PP, PV, Homing, CSP and CSV.
- Wide range of motor phase current setting and motor current overboost (120%).
- Different variety of HOMING operation modes.
- Encoder feedback and support of different resolution.
- Touch Probe function available.
- Limit switches management.
- 4 + 3 I/Os and 2 STO.
- Auto-sync function available featuring a closed loop positioning.

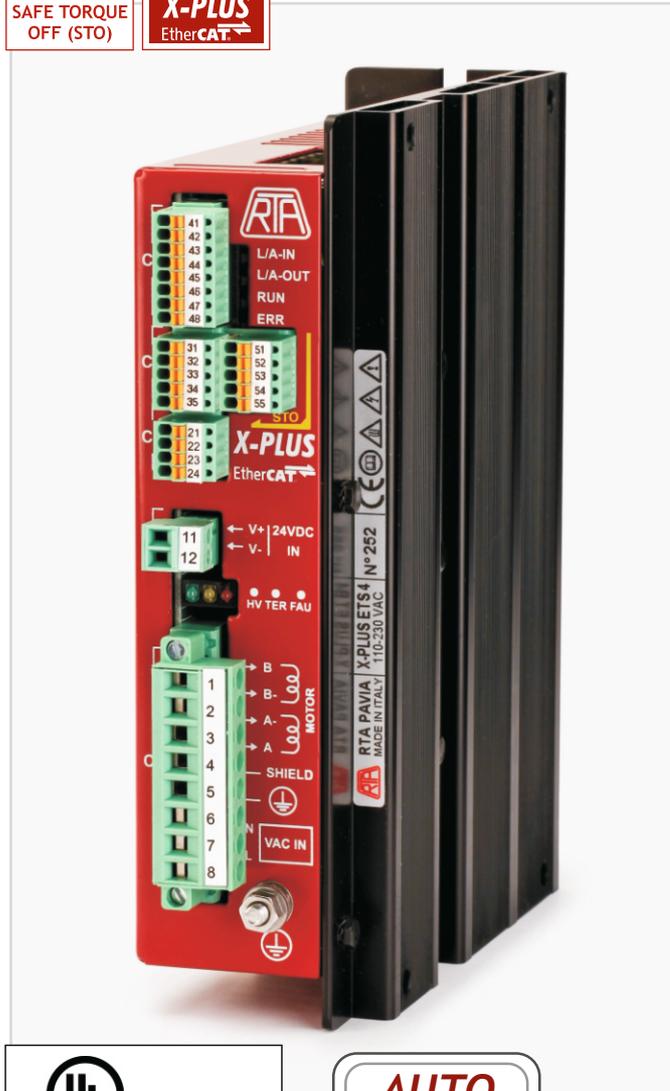

UL US LISTED
FILE NUMBER: E306454

**AUTO
SYNC**
FUNCTION

Please refer to download.rta.it
for technical specifications

STO FUNCTION FEATURES

- Safe Torque Off (STO) function - **SIL3**
- Error Detection Monitor

SIL3
SAFE TORQUE
OFF (STO)

Series	Model	V _{AC} range (Volt)	I nom. (Amp)	Digital In/Out	STO In	Dimensions (mm)
X-PLUS ET	S4	110 to 230 +/- 15%	4.0	4/3	2	169x129x46

TECHNICAL FEATURES

- Possibility to switch off motor current by means of STO function.
- Range of operating voltage 110-230 VAC.
- Protections:
 - Protection against under-voltage and over-voltage.
 - Protection against a short-circuit at motor outputs.
 - Overtemperature protection.
- Electronic damping facility for further acoustic noise and mechanic vibrations reduction.
- Available in boxed version with plug-in connectors.
- Maximum compactness.
- Optoinsulated auxiliary and programmable inputs and outputs.
- External fans not needed.
- UL/CSA.
- Warranty: 24 months.




EtherCAT



SCAN THE QR CODE TO WATCH A VIDEO ON THE AUTO-SYNC FUNCTION



POWER AND LOGIC CONNECTIONS

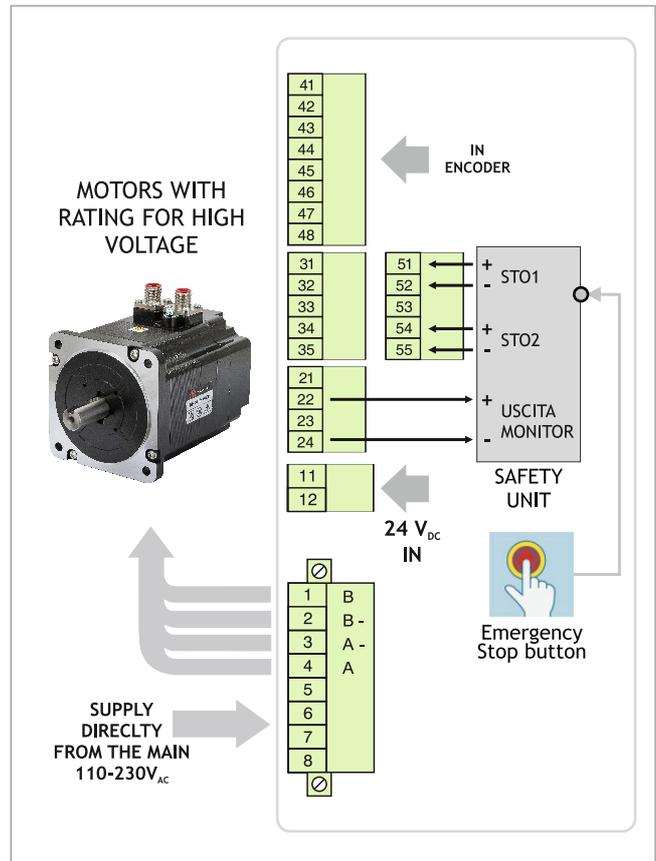


STO FUNCTION FEATURES

- Safe Torque Off (STO) function [SIL3]
- Error Detection Monitor



MECHANICAL DIMENSIONS

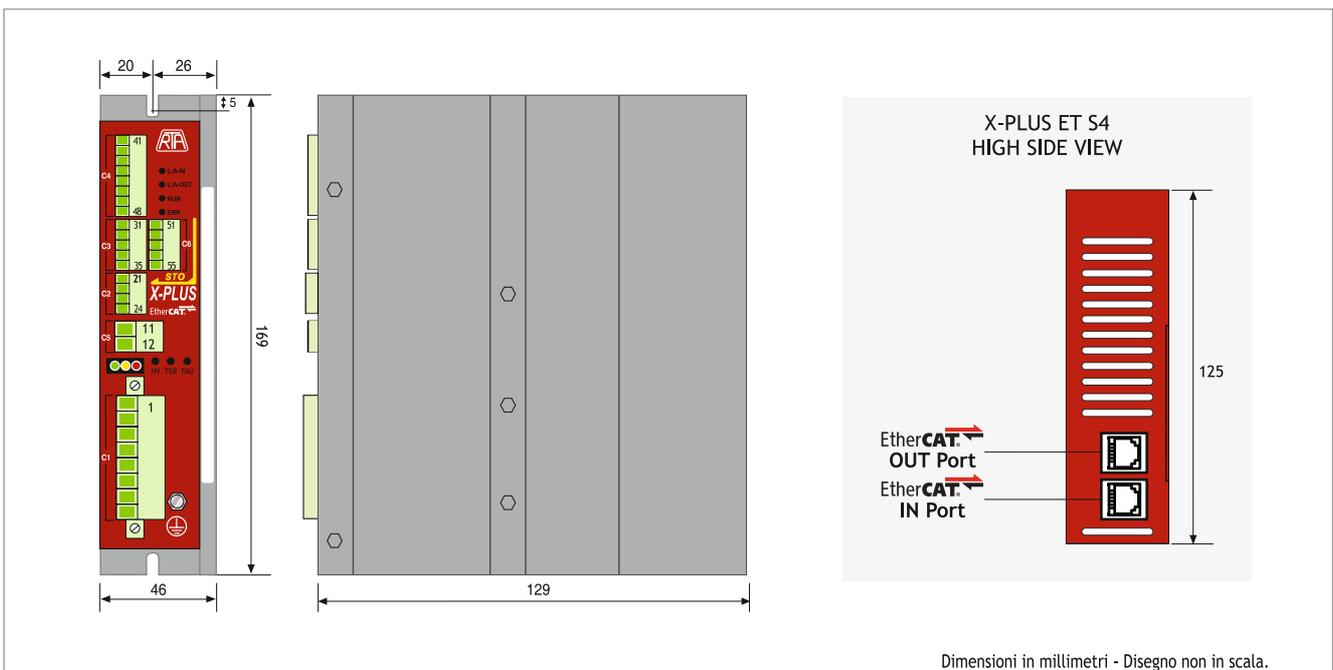

R.T.A. s.r.l.
Via E. Mattei - Fraz- Divisa
27020 Marcignago (PV) (Italy)
T +39.0382.929.855
F +39.0382.929.150
www.rta.it

R.T.A. Deutschland GmbH
Bublitzter Strasse 34, 40599
Duesseldorf (Germany)
T +49.211.749.668.60
F +49.211.749.668.66
www.rta-deutschland.de

R.T.A. IBERICA
C/Generalitat 22, Local 1
08850 Gava - Barcelona (Spain)
T +34 936.388.805
F +34 936.334.595
www.rta-iberica.es

R.T.A. INDIA Pvt
Teerth Business Center 3rd Floor, Unit No. 7,
Block EL-15, MIDC Bhosari Pimpri-Chinchwad,
Pune 411026 (India)
Tel. +91 9422507445
www.rta-india.in