


Plastic Fiber Bifurcated Fiber PBE46UTMLLP

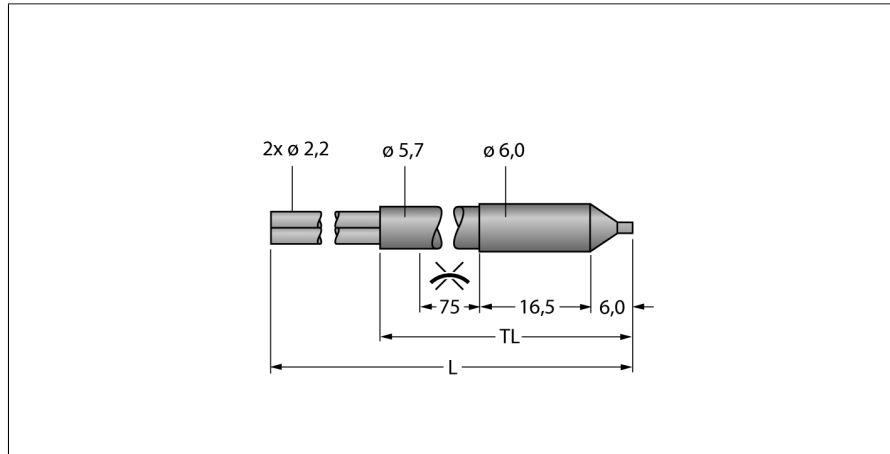

- Operating mode: Diffuse/Retroreflective
- For detecting filling levels
- Polyethylene jacket, flexible
- Operating temperature: -30...+85 °C
- Male end, pluggable
- End sleeve for sensor, encapsulated
- Optical fiber, core diameter 1.0 mm
- Optical fiber, total length: ± 1829 mm

Functional principle

Glass or plastic fibers are the optimum choice for high-temperature applications and limited spaces. They transfer the light from the sensor to a remote object. Individual fibers are used for opposed mode sensing, whereas bifurcated fibers are suited for retroreflective or diffuse mode operation.

Type	PBE46UTMLLP
ID	3048056
Optical data	
Function	Diffuse mode sensor
Fiber-optic type	Plastic
Mechanical data	
Design	Circular
Housing material	Plastic, PE, Black
Jacket material	FEP
Jacket material	plastic, PE
Bundle diameter	1 mm
Material of the fiber-optic tip	FEP
Bending cycles	5000
Bending radius	Ø 25 mm
Ambient temperature	-30...+85 °C
Max. temperature tip	70 °C
Special features	
	Chemical-resistant
	Filling level detection
	Resistant to chemicals