


TL50BLGR2AQ

LED Indicator – Tower Light




Technical data

| | |
|------------------------------------|------------------------------|
| Type | TL50BLGR2AQ |
| ID | 3060716 |
| Signal and display data | |
| Purpose | LED indicator light |
| Function | Tower light |
| Light type | Green Red, flashing |
| Dimmable | No |
| Features of color 1 | Green, Permanently on, 52 lm |
| Features of color 2 | Red, Flashing, 24 lm |
| Acoustic signal | Continuous tone, 92 dB |
| Electrical data | |
| Operating voltage | 18...30 VDC |
| DC rated operational current | ≤ 45 mA |
| Operating voltage | 21...27 VAC |
| Max. current consumption per color | 125 mA |
| Max. current consumption of beeper | 25 mA |
| Input type | Bipolar (PNP/NPN)22 |
| Response time typical | < 1 ms |
| Mechanical data | |
| Cascadable | No |
| Design | Smooth barrel, TL50 |
| Dimensions | Ø 50 x 130.3 mm |
| Housing material | Plastic, ABS, Black |
| Window material | Polycarbonate, clear |
| Electrical connection | Connector, M12 × 1, PVC |
| Number of cores | 4 |

Features

- Plastic housing, black
- EMI and RFI immune
- Protection class IP50
- M12 x 1 male
- Colors: Green (COL 1) / Red flashing (COL 2)
- Operating voltage: 18...30 VDC or 24 VAC with 45 mA per LED color
- Inputs: PNP/NPN
- Beeper max. 92 dB

Wiring diagram

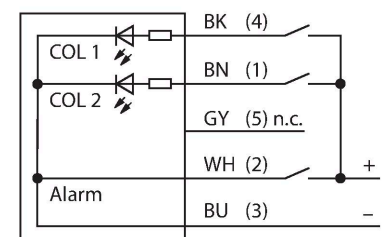

Functional principle

The TL50 tower lights provide highly visible status indicators and a clear user guidance within the entire system. They can be assembled from varicolored LEDs and are available with or without beeper. You can mount them directly on machines, in the cabinet or in monitoring locations of production lines.

The wiring diagram shows a PNP pin assignment. There are 10 colors available blue (B), green (G), red (R), yellow (Y), white (W), turquoise (T), orange (O), violet (V), sky blue (S) and magenta (M), which specify the light sequence from bottom to top in the type code of the tower light. Example: TL50GYRQ, colors green, yellow and red arranged from bottom to top.


Technical data

| | |
|---------------------|---------------|
| Ambient temperature | -20...+50 °C |
| Relative humidity | 0...95 % |
| Protection class | IP50 |
| Tests/approvals | |
| Approvals | CE, UL listed |

Accessories


| | |
|--------|---------|
| SMB30A | 3032723 |
|--------|---------|

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread




| | |
|---------|---------|
| SMB30FA | 3074005 |
|---------|---------|

Montagewinkel; Werkstoff VA 1.4401



| | |
|---------|---------|
| SMB30SC | 3052521 |
|---------|---------|

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable



Accessories

| Dimension drawing | Type | ID | |
|-------------------|---------------|---------|---|
| | RKC4.4T-2/TEL | 6625013 | Connection cable, M12 female connector, straight, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval |
| | WKC4.4T-2/TEL | 6625025 | Connection cable, M12 female connector, angled, 4-pin, cable length: 2 m, jacket material: PVC, black; cULus approval |